

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.

The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit.

We offer a basic range of 38 models but the choice is infinite.

The range presented here consists of 3 models with a remote refrigeration unit with a temperature from -2° to +10°C. Models are available with 3 doors; 2 doors and 2x½ drawers; 1 door and 4x½ drawers; and 6x½ drawers.



113168

PT 3 SERIES

REMOTE REFRIGERATED TABLES 1800 **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in AISI 304 stainless steel with satin finish and polished interior guaranteeing maximum reliability. 2" height-adjustable AISI 304 stainless steel feet (-15 to +80 mm). Completely removable grid support structure in AISI 304 stainless steel.

- ◆ The worktop has a height of 50 mm and is slotted into place for easy removal.

- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection, guarantees exceptional, long-term insulation and notable energy savings.

- ◆ These appliances are suitable for use in tropical climates (+43°C) ensuring high performance even in extreme ambient conditions.

- ◆ The base, with water drain, is pressed and features rounded internal corners to guarantee perfect cleaning.

- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.

- ◆ These models are designed for use with remote refrigeration units which means that the removal of a source of heat from the working environment solves problems of high temperatures or inadequately ventilated

| CHARACTERISTICS | MODELS | | | |
|------------------------------------|--------------------|--------------------|--------------------|--------------------|
| | TRRN183A 113167 | TRRN183B 113168 | TRRN183C 113169 | TRRN183D 113170 |
| Operating temperature - min/max °C | -2/10 | -2/10 | -2/10 | -2/10 |
| Operating mode | Ventilated | Ventilated | Ventilated | Ventilated |
| Gross capacity (D.I.N. 8952) - l. | 440 | 440 | 440 | 440 |
| External dimensions - mm | | | | |
| width | 1759 | 1759 | 1759 | 1759 |
| depth/with open doors | 700, 1110 | 700, 1110 | 700, 1110 | 700, 1110 |
| height | 850 | 850 | 850 | 850 |
| Internal dimensions - mm | | | | |
| depth | 580 | 580 | 580 | 580 |
| height | 530 | 530 | 530 | 530 |
| Min/Max internal humidity - % | 80/95 | 80/95 | 80/95 | 80/95 |
| N° of drawers | | 2 | 4 | 6 |
| N° and type of door | 3 | 2 | 1 | |
| Door hinges | 1 Left+2 Right | 1 Left+1 Right | Left | |
| N° and type of grids (included) | 3, GN 1/1 | 2, GN 1/1 | 1, GN 1/1 | GN 1/1 |
| N° defrost in 24 hrs. | 3/15' | 3/15' | 3/15' | 3/15' |
| Refrigerant type | R134a | R134a | R134a | R134a |
| Net weight - kg. | 130 | 138 | 146 | 154 |
| Power supply - V, phases, Hz | 230 V, 1N, 50 | 230 V, 1N, 50 | 230 V, 1N, 50 | 230 V, 1N, 50 |
| INCLUDED ACCESSORIES | | | | |
| 1/1 GN GREY "RILSAN" GRID | 3 | 2 | 1 | |

rooms. The remote refrigeration units are supplied with a control box that includes: a thermostatic valve, evaporator and a control panel. It is possible to have each refrigerated table connected to a specific remote refrigeration unit or to connect several appliances to a central refrigeration plant.


- ◆ The refrigerated tables feature: reversible, self-closing doors; recessed ergonomical handles.
- ◆ The drawers feature: fully removable, telescopic runners in AISI 304 stainless steel; perforations for improved ventilation.
- ◆ Doors and drawers are interchangeable on site.

- ◆ All the models are supplied as standard with an ambient drawer, 100 mm in height, above the refrigeration unit.
- ◆ CFC and HCFC free.
- ◆ All models comply with the standards required by the main international approval bodies and are H marked.

| ACCESSORIES | MODELS | | | |
|--|--------------------|--------------------|--------------------|--------------------|
| | TRRN183A 113167 | TRRN183B 113168 | TRRN183C 113169 | TRRN183D 113170 |
| 1/1 GN GREY "RILSAN" GRID | 881435 | 881435 | 881435 | 881435 |
| 2 WHEELS FOR REFRIGERATORS/REFRIG.TABLES | 880539 | 880539 | 880539 | 880539 |
| CHEST OF 2 DRAWERS FOR REFRIGER.COUNTER | 881505 | 881505 | 881505 | 881505 |
| CHEST OF 3 DRAWERS FOR REFRIGER.COUNTER | 881506 | 881506 | 881506 | 881506 |
| HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX) | 880119 | 880119 | 880119 | 880119 |
| HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX) | 880132 | 880132 | 880132 | 880132 |
| HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX) | 880133 | 880133 | 880133 | 880133 |
| KIT HACCP EKIS | 922166 | 922166 | 922166 | 922166 |
| LOCK FOR REFRIGERATED COUNTERS | 881499 | 881499 | 881499 | 881499 |
| PLASTIC CONTAINER GN 1/1 H=100 MM | 811451 | 811451 | 811451 | 811451 |
| PLASTIC CONTAINER GN 1/1 H=150 MM | 881040 | 881040 | 881040 | 881040 |
| PLASTIC CONTAINER GN 1/1 H=65 MM | 881038 | 881038 | 881038 | 881038 |
| PRINTER FOR HACCP BASIC VERSION REFRIG. | 881457 | 881457 | 881457 | 881457 |
| REMOTE UNIT -2+10°C FOR 550/650 L | 881463 | 881463 | 881463 | 881463 |



www.zanussiprofessional.com

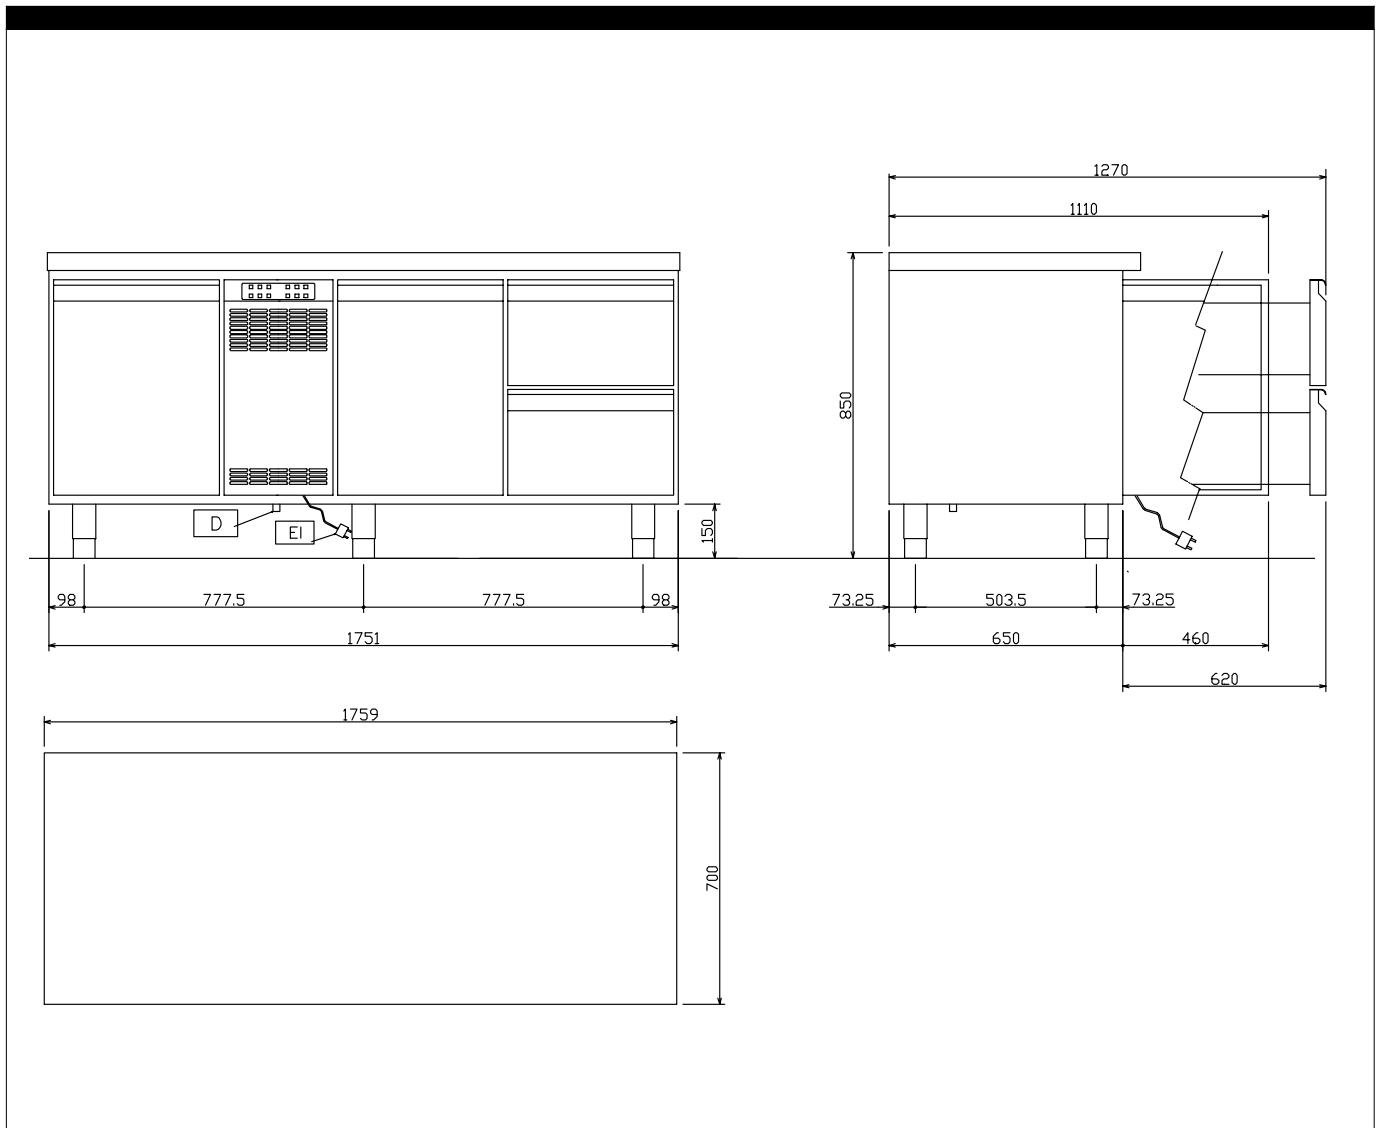

| | TRRN183A 113167 | TRRN183B 113168 | TRRN183C 113169 | TRRN183D 113170 |
|--------------------------------------|--------------------|--------------------|--------------------|--------------------|
| D - Water drain | 16mm | 16mm | 16mm | 16mm |
| EI - Electrical connection | 230 V, 1N, 50 | 230 V, 1N, 50 | 230 V, 1N, 50 | 230 V, 1N, 50 |
| RI - Remote refrigeration connection | ● | ● | ● | ● |



www.zanussiprofessional.com